

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

PCT / SE 2004 / 000173

RECEIVED

01 MAR 2004

WIPO

PCT

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) *Sökande* *Tetra Laval Holdings & Finance SA, Pully CH*
Applicant (s)

(21) *Patentansökningsnummer* *0300553-5*
Patent application number

(86) *Ingivningsdatum* *2003-02-28*
Date of filing

Stockholm, 2004-02-19

För Patent- och registreringsverket
For the Patent- and Registration Office

Marita Öun
Marita Öun

Avgift
Fee

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

PATENT- OCH
REGISTRERINGSVERKET
SWEDEN

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

A PACKAGING LAMINATE AND A PACKAGING CONTAINER MANUFACTURED THEREFROM

TECHNICAL FIELD OF THE INVENTION

5 The present invention relates to a packaging laminate, comprising a paper or paperboard bulk layer, a first gas barrier layer of SiOx, coated onto a first polymer carrier layer, a first outermost layer of a heat-sealable polyolefin and a second outermost layer of a heat-sealable polyolefin on the opposite side of the laminate. The invention also relates to a packaging container produced from the
10 packaging laminate.

BACKGROUND OF THE INVENTION

 Packaging laminates according to the preamble are known from e.g.
15 WO94/29103.

 In the high-speed, continuous packaging processes well known for the paperboard packages of the Tetra Brik® -type, a web of the packaging laminate is continuously formed into a tube, filled with contents and sealed off to pillow-shaped packaging containers by a simultaneous heat sealing and cutting operation. The pillow-shaped packaging container is then normally fold formed into a parallelepipedic packaging container. The main advantage of this continuous
20 tube-forming, filling and sealing packaging process concept is that the web may be sterilised continuously just before tube-forming, thus providing for the possibility of an aseptic packaging process, i.e. a process wherein the liquid
25 content to be filled in as well as the packaging material itself are reduced from bacteria and the filled packaging container is produced under clean circumstances such that the filled package may be stored for a long time even at ambient temperature, without the risk of growth of micro-organisms in the filled product. An important factor for long-term storage is of course also the gas barrier
30 properties of the filled and sealed packaging container, which in turn is highly dependent on the gas barrier properties of the packaging laminate itself. An other important advantage of the Tetra Brik® -type packaging process is, as stated above, the possibility of continuous high-speed packaging, which has considerable impact on cost efficiency.

The advantages of a SiOx gas barrier layer compared to other gas barrier materials are firstly that it has a positive environmental profile, secondly, that it is not affected when in contact with surrounding moisture or liquid and since it is applied in very thin layers, it is also flexible and resistant to cracking when bent or folded. Moreover, it allows for the contents of a package formed from the packaging laminate to be subjected to microwave heating, while the contents are in the package.

However, for long time storage even at ambient temperatures, the gas barrier properties of the package not only depend on the gas barrier properties of the packaging laminate, but also greatly depend on the quality of the seals of the final package. If the seals are of poor quality, oxygen will penetrate into the contents of the package notwithstanding how good the gas barrier properties of the laminate are.

Another important aspect of a packaging laminate is structural integrity, i.e. its ability to withstand delamination. It is of utter importance that the paper or paperboard bulk layer and the gas barrier layer have excellent bonding to each other, over their entire surfaces (directly or indirectly) facing each other.

US 5,731,092 discloses a packaging material comprising a film covered with silicon oxide and a polyolefin film, wherein a binder arranged between the silicon oxide and the polyolefin film is selected from the group consisting of polyolefins grafted with unsaturated alkoxy silanes, polyolefins grafted with unsaturated epoxides, and copolymers of ethylene and of at least one unsaturated epoxide. The grafted polyolefin binder is arranged as a binding layer in contact with the silicon oxide layer and binding the same to the polyolefin film.

Although it has been shown that the grafted polyolefin as such, according to US 5,731,092, provides for a good adhesion to silicon oxide, it has now been found that the internal adhesion in a packaging laminate, between a silicon oxide layer and an adjacent layer, such as a paper or paperboard bulk layer, when using the grafted polyolefin in a binding layer therebetween, does not get as good as would be expected. Accordingly, undesirable delamination may occur, through failure of the binding layer.

ACCOUNT OF THE INVENTION

It is therefore an objective of the present invention to provide a packaging laminate that alleviates the above discussed disadvantages and problems.

5 It is an objective of the present invention to provide a packaging laminate having gas barrier properties, both in respect of the packaging laminate itself and the seals of a package produced from it, suitable for aseptic packaging and long-term storage, as well as sufficient bending stiffness to be suitable for continuous, high speed packaging of liquid foods by means of a continuous tube-forming
10 process.

The invention is also directed to a packaging container filled with solid, semi-solid or liquid food or beverage and produced from the packaging laminate of the invention.

These and other objectives are achieved by means of the packaging
15 laminate and the packaging container according to the invention, as defined in the appended claims.

It has been found that by providing a packaging laminate according to the introduction with an second outermost layer of a heat-sealable polyolefin comprising a metallocene polyethylene material, on the side of the laminate that
20 is intended to face the interior of the packaging container to be formed from the same, the gas barrier properties of the seals of the packaging container can be improved to match the very good gas barrier properties of the SiOx gas barrier layer.

Suitably, said metallocene polyethylene material is a metallocene low
25 density polyethylene material, preferably a metallocene linear low density polyethylene material.

According to one aspect of the invention, the basis weight of the metallocene polyethylene layer is from 5 to 30 g/m², preferably from 8 to 25 g/m², more preferably from 10 to 20 g/m², dry calculated.

30 According to another aspect of the invention, a third layer of a heat-sealable polyolefin, preferably a polyethylene material, is arranged in direct contact with the metallocene polyethylene layer and preferably co-extruded together with it. Suitably, this third layer is extruded at a higher temperature than the metallocene polyethylene layer. The difference in extrusion temperature

provides for improved adhesion by the third (high temperature extruded) heat-sealable polyolefin layer and for avoiding off-taste problems by the second (low temperature extruded) metallocene polyethylene layer. Typically, the third layer is extruded at temperatures well above 300 °C, preferably above 310 °C and even more preferred at 320 °C or above, while the second layer is extruded at temperatures well below 300 °C, preferably below 290 °C and even more preferred at 280 °C or below.

A laminate according to the invention is especially well adapted to be used in connection with ultrasonic vibration heat sealing. A feature of the ultrasonic vibration heat sealing technique is that the entire material under pressure between the ultrasonic horn and the anvil jaw is heated up by the vibrations at the same time. For a strong seal to take place, it is enough that the outermost layer (i.e. the outermost layer on the side of the laminate that is facing the inside of the container) reaches the melting point. As a consequence it is enough to provide only a thin sealing ply of the metallocene polyethylene material in the inside layer, in order to decrease the sensibility of the ultrasonic vibration heat sealing process and to achieve strong, air-tight and liquid-tight seals.

The SiOx layer is preferably deposited on the carrier layer by PECVD technique, wherein $x=1.7-2.0$, at a thickness of from about 50 to about 500 Å, preferably from about 80 to about 300 Å. There exist alternative methods of depositing inorganic layers, such as SiOx, onto polymer films, which however, generally result in thicker and less flexible layers of the SiOx. This in turn, due to the formation of cracks in the SiOx layer, generally results in laminates of lower quality with regard to oxygen barrier properties. It is thus preferred according to the invention that the SiOx gas barrier layers are applied by means of the continuous method of plasma enhanced chemical vapour deposition, PECVD, of SiOx from a plasma of an organic silicon compound, such as hexadimethylsiloxane (HDMSO).

Preferably, the carrier layer of oriented polymer is a premanufactured film of polyester or polyamide, such as a cast film or preferably a mono- or biaxially oriented film of polyethyleneterephthalate (PET), polyethylenenaphthenate (PEN), polyamide (PA) or polybutylene terephthalate (PBT). By using premanufactured oriented polymer films as the carrier layers, it is ensured that they have some

inherent bending stiffness relative to other layers in the laminate that are extrusion or coextrusion laminated.

Preferably, the thickness of the carrier polymer layer is from about 7 to about 30 μm , more preferably from about 8 to about 20, most preferably from about 8 to about 15 μm . It is known that the PECVD process works optimally with the above thickness of the carrier layer, which is also preferred from the economical point of view.

The paper or paperboard bulk layer is arranged to provide for the greatest contribution to the flexural rigidity of the laminate.

According to a preferred embodiment of the invention, the packaging laminate comprises a binding layer in direct contact with the SiOx gas barrier layer, which binding layer comprises a polyolefin grafted with an unsaturated alkoxysilane.

Surprisingly, it has been found that the number of adhesion points between the grafted sites in the binder and the silicon oxide can be vastly increased if the grafted polyolefin is blended with a non-grafted polyolefin, i.e. the number of adhesion points increases despite less grafted sites in the binder polymer. Hence, according to a most preferred embodiment of the invention, the grafted polyolefin is blended with a non-grafted polyolefin, in said binding layer. Suitably, the grafted polyolefin and the non-grafted polyolefin are polyolefins of the same type, preferably polyethylene type polyolefins. It is preferred that the binding layer comprises 30 – 70 %, preferably 40 – 60 % and even more preferred 45 – 55 % by weight of the grafted polyolefin. The binding layer suitably has a basis weight of 2-35 g/m^2 , preferably 5-30 g/m^2 and even more preferred 10-25 g/m^2 , calculated on dry matter. Also preferred is that the binding layer is co-extruded together with a non-grafted polyolefin layer, the binding layer being disposed in contact with the SiOx gas barrier layer. In this case, it may suffice to have a binding layer composed of the blended binder, that amounts to 2-20 g/m^2 , preferably 2-15 g/m^2 and even more preferred 2-10 g/m^2 , calculated on dry matter. The polyolefin that is co-extruded together with the binding layer composed of the blended binder, is preferably a polyolefin of the same type as the grafted and non-grafted polyolefin of the binder, most preferably a polyethylene polyolefin.

The concept of the binding layer that comprises a blend of grafted and non-grafted polyolefin is based on the insight that it is not only the number of grafted sites that affects the degree of adhesion, but also their ability to physically come in contact with the silicon oxide. It has been found that the grafting of polyolefin according to US 5,731,092 results in a cross-linking of the polyolefin, which makes the polyolefin less flexible than the non-grafted polyolefin. Due to the impaired flexibility of the grafted polyolefin, the number of contact points between the binding layer composed of the grafted polyolefin and the silicon oxide will be less than for a binding layer solely composed of a non-grafted polyolefin of the same type. However, in a binding layer solely composed of a non-grafted polyolefin, the adhesion in an individual adhesion point of the plurality of adhesion points will not be as good as in an individual adhesion point of a binding layer composed solely of a grafted polyolefin.

The preferred embodiment of the present invention solves the problem related to these contradictory aspects of grafted and non-grafted polyolefin binders, by providing a binder that is a blend of a grafted polyolefin and a non-grafted polyolefin. Here, the improved flexibility that is achieved due to the presence of a non-grafted polyolefin provides for an increased number of adhesion points, while the grafted polyolefin provides for improved adhesion in those points, all in all resulting in adhesion properties that are better than the adhesion properties of a grafted polyolefin binder per se and a non-grafted polyolefin binder per se. The adhesion is improved the most at wet conditions.

According to one aspect of the invention, the polyolefins which are grafted with alkoxysilanes are chosen from the group that consist of:

- 25 homopolymers of ethylene or of propylene;
- copolymers of ethylene and of vinyl acetate;
- copolymers of ethylene and of at least one alkyl(meth)acrylate. The alkyl groups of the alkyl(meth)acrylate has up to 10 carbon atoms and can be linear, branched or cyclic.
- 30 Mention may be made, among alkoxysilanes carrying an unsaturation, of:
 $\text{CH}_2=\text{CH}-\text{Si}(\text{OR})_3$, vinyltrialkoxysilanes
 $\text{CH}_2=\text{CH}-\text{CH}_2-\text{Si}(\text{OR})_3$, allyltrialkoxysilanes
 $\text{CH}_2=\text{CR}_1-\text{CO}-\text{O}-\text{Y}-\text{Si}(\text{OR})_3$

(meth)acryloxyalkyltrialkoxysilanes (or (meth)acrylsilanes) in which:

R is an alkyl having from 1 to 5 carbon atoms or an alkoxy $-R_2OR_3$ in which R_2 and R_3 are alkyls having at most 5 carbon atoms for the combined unit R_2 and R_3 ;

5 R_1 is a hydrogen or methyl;

Y is an alkylene having from 1 to 5 carbon atoms.

The ratio by weight of the grafts to the grafted polymer is generally between 0.1 and 5 % and preferably 0.15 to 2.5 %.

10 The binder may be constituted of a dry blend of the grafted polyolefin and the non-grafted polyolefin. This may be realized for example by dry blending grafted polyolefin granules with non-grafted polyolefin granules, such that they will melt together in connection with the melting when the binder is applied as a binding layer in the packaging laminate, by extrusion e.g.

15 On the other hand, the binder may be constituted of a compound blend of the grafted polyolefin and the non-grafted polyolefin, i.e. the grafted and non-grafted polyolefins being intimately blended with each other, at molecular level, already before the binder is melted in connection with the application of the binder as a binding layer in the packaging laminate. This may be realized for example by individual granules being produced, that are composed of a blend of
20 the grafted polyolefin and the non-grafted polyolefin.

25 The packaging container according to the invention may be of any known shape. Preferably, it is a wedge-shaped container that is durable at handling and distribution and resistant to moisture and oxygen gas during long term storage, due to the high quality packaging laminate, which in turn also provides for high seal quality and excellent gas barrier properties. A further important advantage of packaging containers produced from the packaging laminate according to the invention is that they are durable to microwave cooking or thawing, as well as retorting.

30 DESCRIPTION OF THE DRAWINGS

Further advantages and favourable characterising features of the present invention will be apparent from the following detailed description, with reference to the appended figures, in which:

Fig. 1 is a cross-sectional view of a preferred laminated packaging material according to the present invention,

Fig. 2 is a cross-sectional view of a another embodiment of a laminated packaging material according to the present invention,

5 Fig. 3 is a cross-sectional view of a another embodiment of a laminated packaging material according to the present invention,

Fig. 4 is a cross-sectional view of a another embodiment of a laminated packaging material according to the present invention, and

10 Fig. 5 shows a preferred example of a packaging container produced from the packaging laminate according to the invention.

Fig. 1 thus shows a packaging laminate 10, comprising a first polymer carrier layer 11a being a film of a preferably oriented polyester, such as for example polyethyleneterephthalate (PET), or a film of a preferably oriented polyamide (PA), onto which is coated a thin gas barrier layer of SiOx 13a by
15 means of plasma enhanced chemical vapour deposition (PECVD).

The thickest layer in the laminate is a bulk paper or paperboard layer 15. It is directly bonded to the SiOx layer 13a, by means of a binding layer 18a. Preferably, in the binding layer 18a in contact with the layer of SiOx 13a and the paper or paperboard layer 15, there is used a blend of a polyethylene base
20 polymer graft modified by an unsaturated alkoxysilane compound, and a corresponding non-grafted polyethylene polymer, which provides for exceptionally good adhesion between the SiOx layer 13a and the paper or paperboard layer 15. The binding layer 18a typically has a basis weight of 5-30 g/m², in this embodiment of the invention.

25 On the outside of the paper or paperboard layer 15, which will constitute the outside wall of a packaging container produced from the packaging laminate, is applied a first outermost layer 16 of a heat-sealable polyolefin, preferably a low density polyethylene (LDPE) or a linear low density polyethylene (LLDPE), which include also so-called metallocene-catalysed LLDPE's (m-LLDPE), i.e. LLDPE
30 polymers catalysed by means of a single site catalyst. Other examples of alternative polymers for the outside packaging wall layer may be medium high density polyethylene (MDPE) or polypropylene (PP).

On the outside of the polymer carrier layer 11a, which will constitute the inside wall of a packaging container produced from the packaging laminate, is applied a second layer 17a of a heat-sealable polyolefin comprising a metallocene polyethylene material. Preferably, a third layer 17b of a heat-sealable polyolefin is arranged in direct contact with the second layer 17a of a heat-sealable polyolefin and is preferably co-extruded together with it, but beneficially at a higher temperature. Hence, the third layer 17b of a heat-sealable polyolefin is arranged between the polymer carrier layer 11a and the second layer 17a of a heat-sealable metallocene polyolefin. Preferably, the third layer of a heat-sealable polyolefin is a layer of LDPE, optionally LLDPE.

For optimal adhesion between the various layers of the packaging laminate, there are preferably used binding layers of adhesive polymers, tie layers and primers, known in the art. Such binding layers and primers are adapted to the specific choices of polymer in the various layers and may be selected from polyolefins and modified polyolefins, preferably polyethylene-based polymers, such as for example LDPE and modified LDPE.

Other examples of binding layers are LDPE homo- or copolymers or graft copolymers of polyethylene, grafted with monomers comprising carboxylic or glycidyl functional groups, such as acrylic monomers or maleic anhydride (MAH) monomers, for example ethylene (meth)acrylic acid copolymer (E(M)AA), ethylene-glycidyl(meth)acrylate copolymer (EG(M)A) or MAH-grafted polyethylene (MAH-g-PE).

Any of the above discussed polymers may also be used in an optional binding layer 20a between the outer heat-sealable polyolefin layers 17a, 17b and the polymer carrier layer 11a.

Fig. 2 shows a packaging laminate 30 according to another embodiment of the invention. The only difference in relation to the packaging laminate 10 of Fig. 1, is that the binding layer 18a, comprising a blend of a grafted and a non-grafted polymer, is thinner (typically 2-15 g/m²) and instead complemented by a complementary binding layer 22 of non-grafted polyolefin polymer. Preferably, the two binding layers 18a and 22 have been co-extruded. In this way, the binding layer 18a of grafted and non-grafted blend provides for exceptionally good adhesion to the SiOx layer 13a, to which it faces directly, while the complementary binding

layer 22 keeps costs down and still ensures that enough total binding layer is present.

Fig. 3 shows a packaging laminate 40 according to yet another embodiment of the invention. The difference in relation to the packaging laminate 10 of Fig. 1, is that the polymer carrier layer 11a, with its coating 13a of SiOx, faces the other way in the laminate. Hence, the SiOx layer 13a is directly bonded to the second layer 17a of a heat-sealable polyolefin comprising a metallocene polyethylene material, by means of the binding layer 18a of grafted and non-grafted polymer blend. The primer 20a is still arranged in contact with the polymer carrier layer 11a and optionally there is a binding layer 23 of polyethylene e.g., between the primer 20a and the paper or paperboard layer 15.

Fig. 4 shows a packaging laminate 50 according to yet another embodiment of the invention. Here, the layers 18a, 13a, 11a and 20a shown in Fig. 1 are "mirrored" in the paper or paperboard bulk layer 15, to form corresponding layers 18b, 13b, 11b and 20b on the side of the paper or paperboard bulk layer 15 that is intended to face the outside of the packaging container to be produced from the laminate. Of course, the layers 23, 20a, 11a, 13a and 18a shown in Fig. 3, could also be mirrored in layer 15 in a corresponding manner, to provide yet another embodiment of the invention. Also embodiments where just one of the SiOx layers is facing outwards in the laminate structure is conceivable.

It should be understood that the embodiments according to Fig. 3 and 4 also may encompass that the binding layer(s) 18a, 18b is/are replaced by a thinner binding layer 18a, 18b that is co-extruded with a complementary binding layer 22 of non-grafted polyolefin polymer, just as is shown in Fig. 2, in which case the blended binding layer 18a, 18b directly faces the SiOx layer 13a, 13b.

The intermediate layer 15 of Fig. 4 is thicker than any of the surrounding layers in the packaging laminate, and provides as such a distancing element between the two carrier layer films 11a, 11b of oriented polymer. The preferred oriented polymer films have a certain degree of inherent stiffness in that they are oriented and thus may have a relatively higher degree of crystallinity than non-oriented polymer films. The paper or paperboard of the intermediate layer 15 also contributes to the stiffness of the packaging laminate as a whole. The so-called I-beam arrangement of two relatively stiff carrier layers laminated on each side of a

thicker and relatively stiff intermediate paper or paperboard layer provides for a laminate having surprisingly good bending stiffness in relation to its thickness. In addition, the arrangement of the two PECVD-deposited SiOx-layers has proved to result in a much more than two-fold increased gas barrier, compared to a
5 laminate or film containing merely one SiOx-layer. Thus, the arrangement of an intermediate layer also acting as a "buffer" for penetration of gas, in particular oxygen gas, provides for surprisingly improved gas barrier properties, which indicates a synergistic effect resulting from this particular arrangement.

If two layers of SiOx are used, the two corresponding carrier polymer films
10 preferably have about the same or exactly the same thickness.

The packaging laminate 10, 30, 40, 50 according to the invention can be produced according to any suitable prior art principle known to the skilled man. For example, with reference to the laminate 10 shown in Fig. 1, the binding layer 18a may be extruded into a laminator nip, between the paper or paperboard bulk
15 layer 15 and a premanufactured film of the SiOx coated polymer carrier layer 13a, 11a. The SiOx layer is treated by flame, plasma or corona treatment before being laminated to the paper or paperboard bulk layer.

Then, the primer 20a is applied by extrusion or coating and finally the first outermost layer 16 of a heat-sealable polyolefin is extruded onto the paper or
20 paperboard bulk layer 15 and the second outermost layer 17a of a heat-sealable polyolefin comprising a metallocene polyethylene material is co-extruded together with the third layer 17b of a heat-sealable polyolefin on the opposite side of the laminate.

Fig. 5 shows a preferred example of a packaging container 60 produced
25 from the packaging laminate 10, 30, 40, 50 according to the invention. The packaging container is particularly suitable for beverages, sauces, soups or the like. It is especially advantageous that the packaging container can be micro-waved, if it contains sauce or soup or the like, after having been punctured. Typically, such a package has a volume of about 330 ml or less, preferably from
30 about 100 to about 250 ml, for example about 125 ml, 200 ml or about 250 ml. It may be of any configuration, but is preferably shaped as a wedge 61, such that it is easy to handle and dimensionally stable when put on a shelf in the food store or on a table or the like. In order to obtain such a "wedge-shape", the bottom part

62 of the package is fold formed such that the transversal heat seal 64 of the bottom is hidden under the triangular corner flaps 63, which are folded and sealed against the bottom of the package.

By way of conclusion it should be observed that the present invention
 5 which has been described above with particular reference to the accompanying drawings, is not restricted to these embodiments described and shown exclusively by way of example, and that modifications and alterations obvious to a person skilled in the art are possible without departing from the inventive concept as disclosed in the appended claims.

Claims

1. A packaging laminate (10, 30, 40, 50), comprising a paper or paperboard bulk layer (15), a first gas barrier layer of SiOx (13a), coated onto a first polymer carrier layer (11a), a first outermost layer (16) of a heat-sealable polyolefin and a second outermost layer (17a) of a heat-sealable polyolefin on the opposite side of the laminate, characterised in that said second outermost layer (17a) comprises a metallocene polyethylene material.
2. A packaging laminate according to claim 1, characterised in that said metallocene polyethylene material is a metallocene low density polyethylene material, preferably a metallocene linear low density polyethylene material.
3. A packaging laminate according to any one of claims 1-2, characterised in that the basis weight of the second outermost layer (17a) is from 5 to 30 g/m², preferably from 8 to 25 g/m², more preferably from 10 to 20 g/m², dry calculated.
4. A packaging laminate according to any one of the preceding claims, characterised in a third layer (17b) of a heat-sealable polyolefin, arranged in direct contact with the second layer (17a) of a heat-sealable polyolefin and preferably co-extruded together with it.
5. A packaging laminate according to any one of the preceding claims, characterised in a binding layer (18a) in direct contact with the first SiOx gas barrier layer (13a), which binding layer comprises a polyolefin grafted with an unsaturated alkoxysilane.
6. A packaging laminate according to claim 6, characterised in that said grafted polyolefin is blended with a non-grafted polyolefin, in said binding layer (18a).

7. A packaging laminate according to claim 6 or 7, characterised in that said grafted polyolefin and said non-grafted polyolefin are polyolefins of the same type, preferably polyethylene type polyolefins.
- 5 8. A packaging laminate according to any one of claims 6-8, characterised in that the binding layer (18a) comprises 30 – 70 %, preferably 40 – 60 % and even more preferred 45 – 55 % by weight of the grafted polyolefin.
- 10 9. A packaging laminate according to any one of claims 6-9, characterised in that said binding layer (18a) has a basis weight of 2-35 g/m², preferably 5-30 g/m² and even more preferred 10-25 g/m², calculated on dry matter.
- 15 10. A packaging laminate according to any one of claims 6-10, characterised in that said binding layer (18a) is co-extruded together with a non-grafted polyolefin layer (22), the binding layer being disposed in contact with the first SiOx gas barrier layer (13a).
- 20 11. A packaging laminate according to any one of the preceding claims, characterised in that the SiOx gas barrier layer (13a) is PECVD deposited, wherein $x=1.7-2.0$, and has a thickness of 50-500 Å, preferably 80-300 Å.
- 25 12. A packaging laminate according to any one of the preceding claims, characterised in that the first SiOx gas barrier layer (13a), on the first polymer carrier layer (11a), faces the paper or paperboard bulk layer (15) and is positioned between the paper or paperboard bulk layer and the second outermost layer (17a) of a heat-sealable polyolefin.
- 30 13. A packaging laminate according to claim 12 and any one of claims 5-10, characterised in that the first SiOx gas barrier layer (13a) is directly bonded to the paper or paperboard bulk layer (15), by said binding layer (18a).

Abstract

A packaging laminate (10, 30, 40, 50), comprising a paper or paperboard bulk layer (15), a first gas barrier layer of SiOx (13a), coated onto a first polymer carrier layer (11a), a first outermost layer (16) of a heat-sealable polyolefin and a second outermost layer (17a) of a heat-sealable polyolefin on the opposite side of the laminate. According to the invention, the second outermost layer (17a) comprises a metallocene polyethylene material. The invention also relates to a packaging container (60) that is manufactured from the packaging laminate.

10

Publication Figure: 1

PRV 03-02-2811

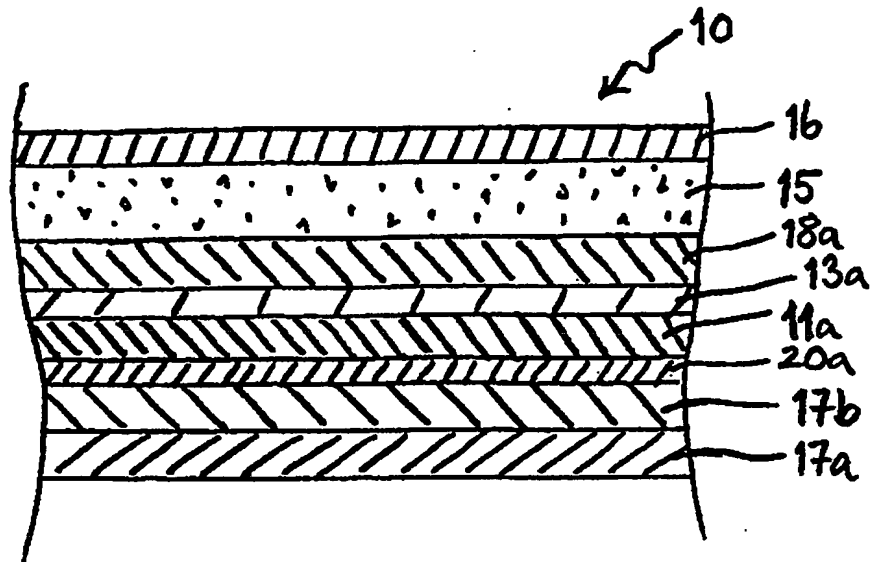


Fig. 1

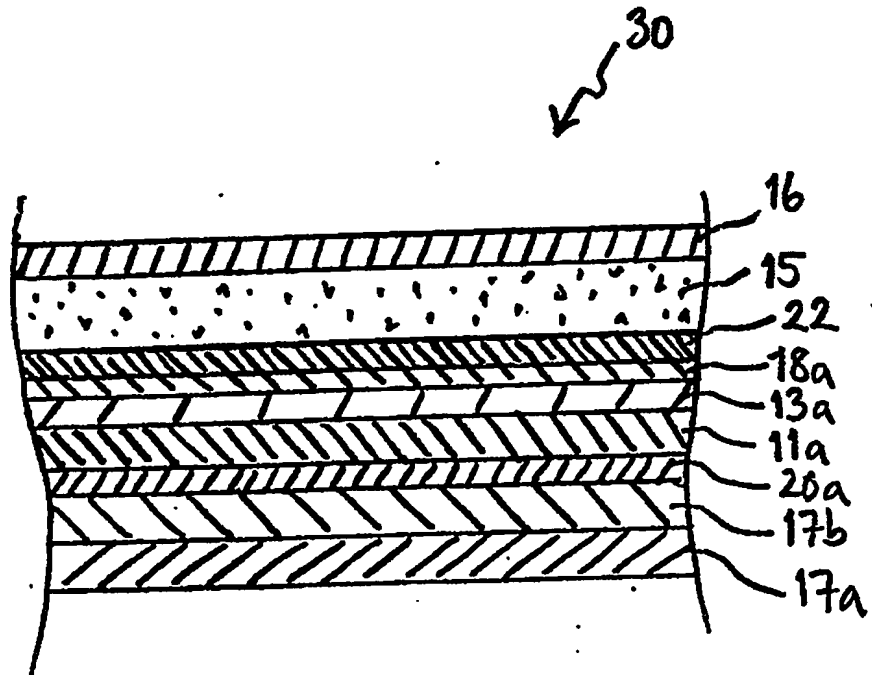


Fig. 2

2/3

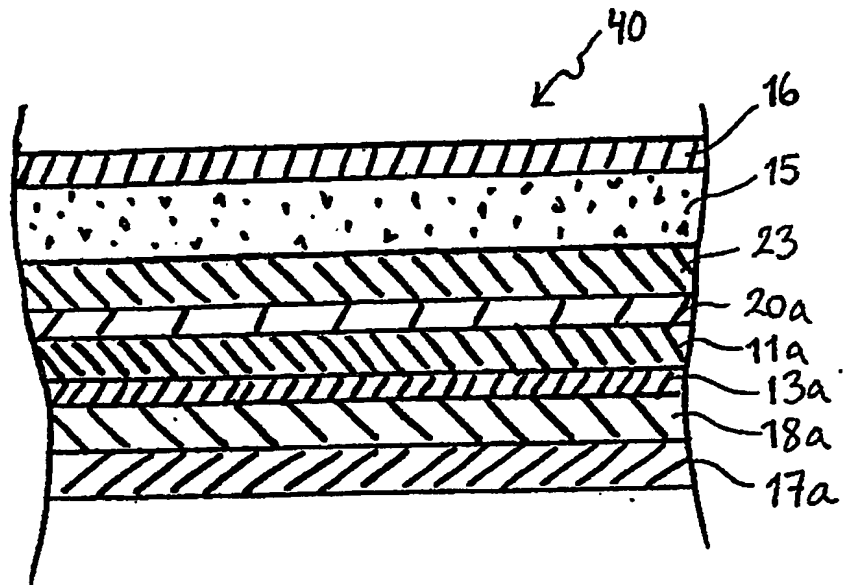


Fig. 3

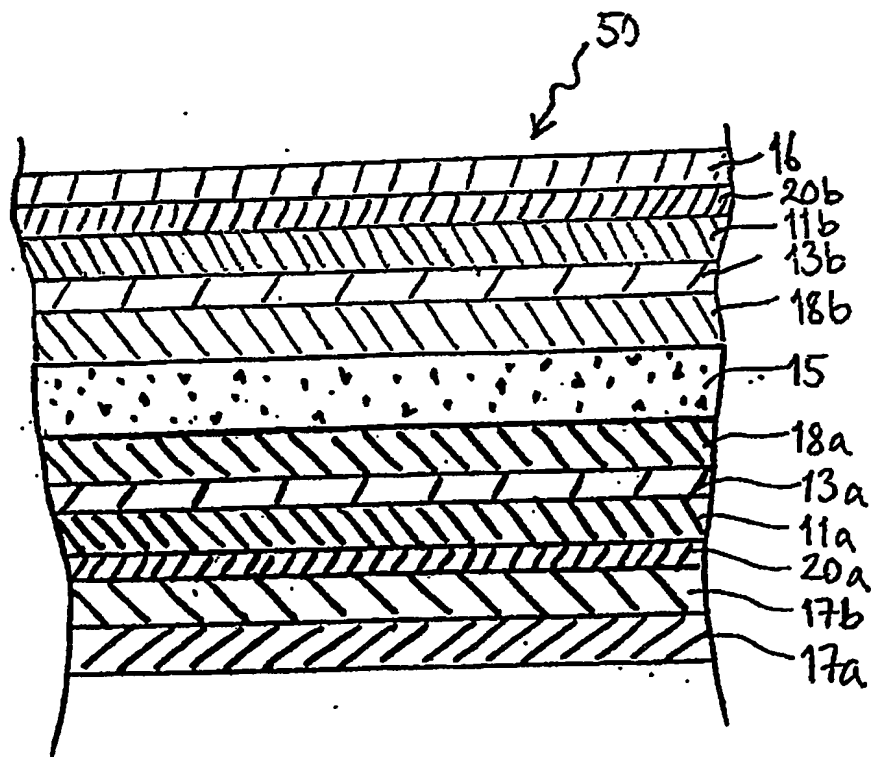


Fig. 4

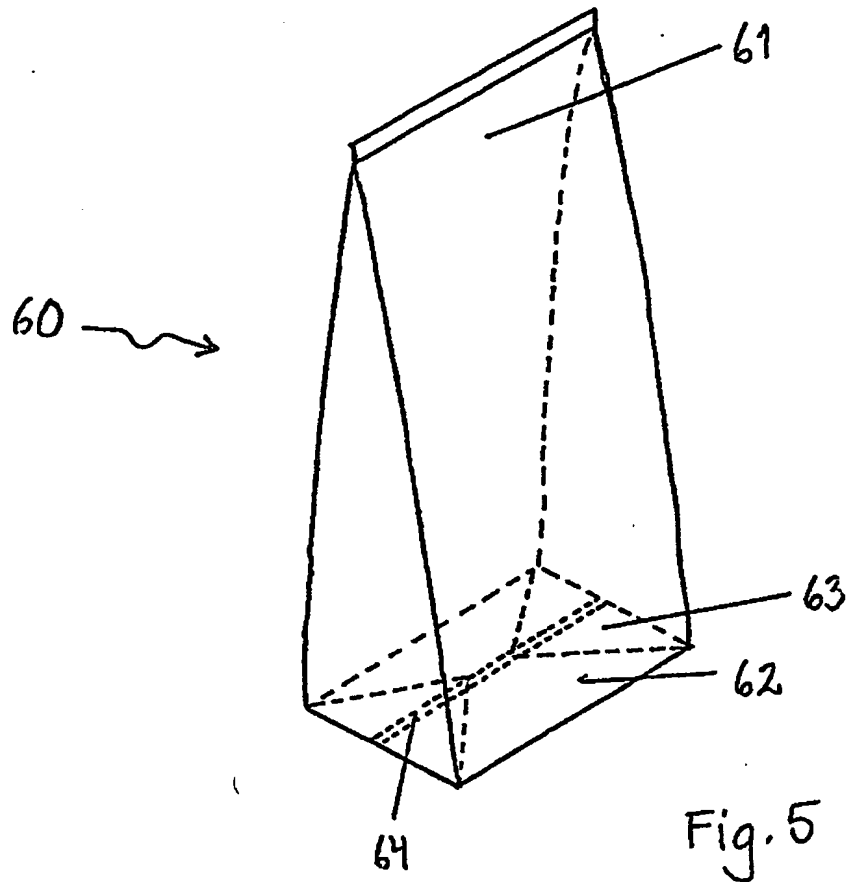


Fig. 5